

Elimination of Sulfate Ions in Water by Addition of an Acidified Calcium Carbonate Suspension

**Attika Sabiou Mahaman ^{a*},
Mamane Imrana Chaibou Ousmane ^a,
Abdou Salam Manzola ^a, Zeinabou Mouhamadou ^a
and Abdoul Bari Idi Awali ^a**

^a *Abdou Moumouni University of Niamey, Materials-Water and Environment Laboratory,
BP: 10662 Niamey, Niger.*

Authors' contributions

This work was carried out in collaboration among all authors. All authors read and approved the final manuscript.

Article Information

DOI: <https://doi.org/10.9734/CSJI/2024/v33i6941>

Open Peer Review History:

This journal follows the Advanced Open Peer Review policy. Identity of the Reviewers, Editor(s) and additional Reviewers, peer review comments, different versions of the manuscript, comments of the editors, etc are available here: <https://www.sdiarticle5.com/review-history/126283>

Original Research Article

Received: 01/10/2024

Accepted: 03/12/2024

Published: 21/12/2024

ABSTRACT

In humans, long-term consumption of water with sulfate levels between 500–750 mg/l can lead to laxative effects, catharsis, dehydration, and irritation of the gastrointestinal tract. As a result, sulfate removal has been widely studied by researchers globally. This study focuses on the elimination of excess sulfate ions in water under controlled stirring and by adding an acidified calcium carbonate suspension. Experimental parameters such as the mass of calcium carbonate and the concentration of hydrochloric acid are studied in order to follow the mechanism of elimination of

*Corresponding author: E-mail: magatacardag83@gmail.com;

sulfate ions. Kinetic monitoring of the residual sulfate concentration by nephelometry shows a progressive drop in the sulfate ion concentration. The variation of calcium carbonate is indifferent on the quantity of sulfates eliminated. The influence of the concentration of hydrochloric acid studied shows a maximum elimination when this concentration is 0.2 mol/L. X-ray diffraction analysis of the solids obtained revealed the presence of gypsum, thus supporting that sulfate ions are eliminated by a process that involves its formation.

Keywords: Calcium carbonate; sulfate; hydrochloric acid; gypsum; elimination; water.

1. INTRODUCTION

Water is a natural resource that, with population growth and development, faces pollution problems. Drinking water has become a public health issue [1]. The number of people relying solely on groundwater to meet their drinking water needs is estimated at nearly 2.5 billion [2]. Sulfate (SO_4^{2-}) is a ubiquitous anion in natural waters. It is not considered toxic, but it can be harmful to freshwater species at high concentrations [3]. "High concentrations of SO_4^{2-} can cause water mineralization, corrosion and scaling of steel pipes and equipment, damage to mammals, and the generation of poisonous and corrosive H_2S in the sewer system" [4]. Sulfated waters produce a significant amount of sulfide [5], especially hydrogen sulfide, which gives the water an unpleasant odor and taste. They also accelerate biological corrosion and impair disinfection due to the proliferation of sulfate-reducing bacteria in stagnant areas of the water distribution network [6]. In humans, "prolonged consumption of water containing 500–750 mg/l sulfate causes laxative effects, catharsis, dehydration, and gastrointestinal irritation" [7,8]. Therefore, "sulfate removal has been extensively investigated around the world by previous researchers" [9,10]. Several techniques are used to reduce excess sulfates in drinking water, such as reverse osmosis [11], nanofiltration [12], ion exchange [12-14], and precipitation [15,16]. Chemical precipitation is a "commonly used method in the treatment of water due to its economical and straightforward nature. For example, chemical precipitation of metals such as insoluble hydroxides, sulphides, or carbonate is practised in the majority of electroplating factories that treat wastewater" [17]. "Chemical precipitation can also be successfully implemented to remove phosphates, sulphates, and fluorides". It is one of the most widely used techniques for the removal of excess sulfates in water because it is simple to apply, pH tolerant, and inexpensive [18]. Except for chemical precipitation, the physicochemical treatments were expensive and had disposal

issues with concentrate or regenerating solution [4]. In this study, we reexamine the removal of sulfates by addition of a suspension of acidified calcium carbonate. The use of calcium carbonate is explained by its abundance in the natural environment.

2. MATERIALS AND METHODS

2.1 Preparation of the Sulfate Solution

Synthetic solutions, Na_2SO_4 salt crystals were dissolved in distilled water with stirring until a clear solution was obtained.

2.2 Preparation of Acidified Calcium Carbonate Suspension

In 500 mL Erlenmeyer flasks, 1 g of CaCO_3 wetted with 5 mL of hydrochloric acid of concentration 0.1 mol/L was introduced and stirred for 4 min to release the Ca^{2+} ions after release of carbon dioxide CO_2 . All calcium carbonate suspensions were prepared by the same procedure.

2.3 Stabilized BaCl_2 solution

The stabilized BaCl_2 solution is prepared with 25% Tween 20 solution. It is a commercial solution with an atomic molar mass of 1228g/mol and density 1.1 in a volume of one liter. It consists of taking 25 mL of this solution and diluting it with 75 mL of distilled water. Dissolve 10 g of BaCl_2 crystals in 20 mL of Tween 20 solution in a 100 mL flask and then top up with distilled water.

2.4 Test Procedure for the Elimination OF Sulfate ions by Adding an Acidified Calcium Carbonate Suspension

First, the acidified suspension of calcium carbonate is obtained by pouring 5 mL of HCl onto CaCO_3 which produces effervescence. After stirring for 4 min, 500 mL of sulfated water with a

concentration of SO_4^{2-} ions of 500 mg/L was added. The mixture is further stirred using a magnetic bar for 0 to 30 min. The pH was checked and samples were taken to monitor the evolution of sulfate ions. For all manipulations, at each 5 min time interval, 1 mL of the solution is taken using a 5 mL syringe minimum from the 0.45 micron filter and then introduced into a 50 mL flask.

2.5 Method for the Determination of Sulfates

The determination of the concentration of the remaining sulfates in the water is done with the 1 mL of the solution taken after each 5 min then diluted 50 times. It is introduced 1 ml of HCl at 1/10, 5 ml of the stabilized BaCl_2 solution. Shake vigorously then let stand for 15 min, shake again and take the reading on the spectrophotometer at the wavelength 650 nm. First make the control with distilled water.

3. RESULTS AND DISCUSSION

3.1 Effect of Acidified CaCO_3 Suspension

Fig. 1 illustrates the variation over time of sulfate concentration by changing the amount of acidified calcium carbonate suspension.

The analysis of Fig. 1 shows a decrease in the concentration of sulfate ions with all the masses of the acidified calcium carbonate suspensions used between 0 and 10 min. This phenomenon is

due to the availability of free Ca^{2+} ions from the dissolution of calcite and could combine with sulfate ions to precipitate calcium sulfate illustrated by equation 4. Beyond 10 min, an increase in the concentration of sulfate ions in the medium is observed. This increase can probably be due to the redissolution of calcium sulfate.

3.1.1 Evolution of the pH by varying the acidified CaCO_3 suspension

Fig. 2 shows the variation over time of the recorded pH by changing the amount of acidified calcium carbonate suspension.

When the synthetic sulfate solution is brought into contact with the acidified calcium carbonate suspension, an increase in pH is observed during the first five minutes, which stabilizes until the end of the manipulation. This increase could be linked to the dissociation of carbonic acid supported by equation (2) and (3). This variation in pH is independent of the quantity of acidified calcite.

3.2 Effect of HCl Concentration when Preparing 3 g of Acidified CaCO_3

3.2.1 Evolution of the concentration of sulfate ions

Fig. 3 illustrates the variation over time of the sulfate concentration by changing the hydrochloric acid concentration per 3 g of the calcium carbonate suspension.

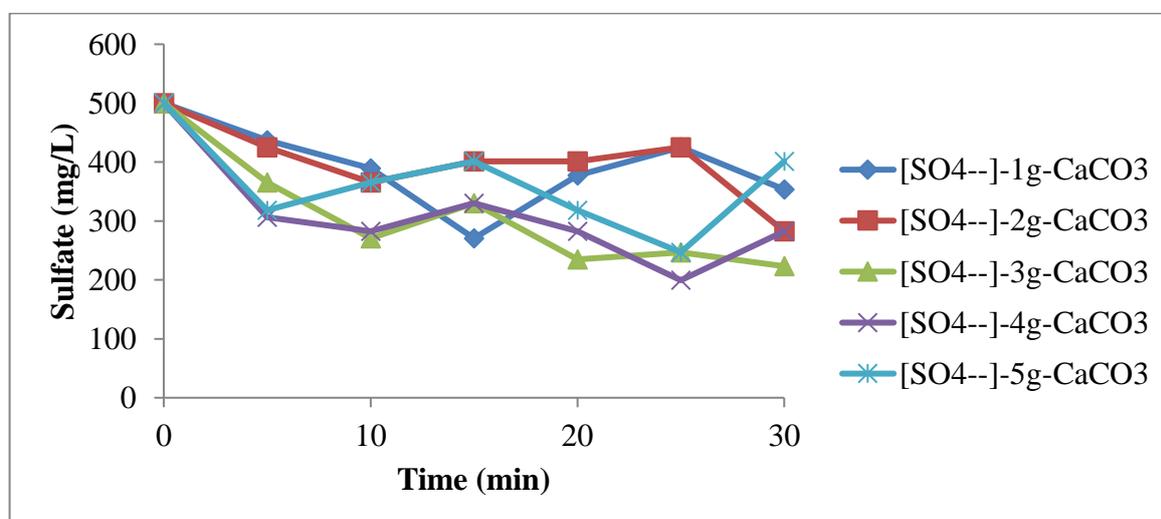


Fig. 1. Sulfate concentration as a function of time by varying the mass of CaCO_3 for the initial sulfate concentration of 500 mg/L with 0.1 mol/L of HCl

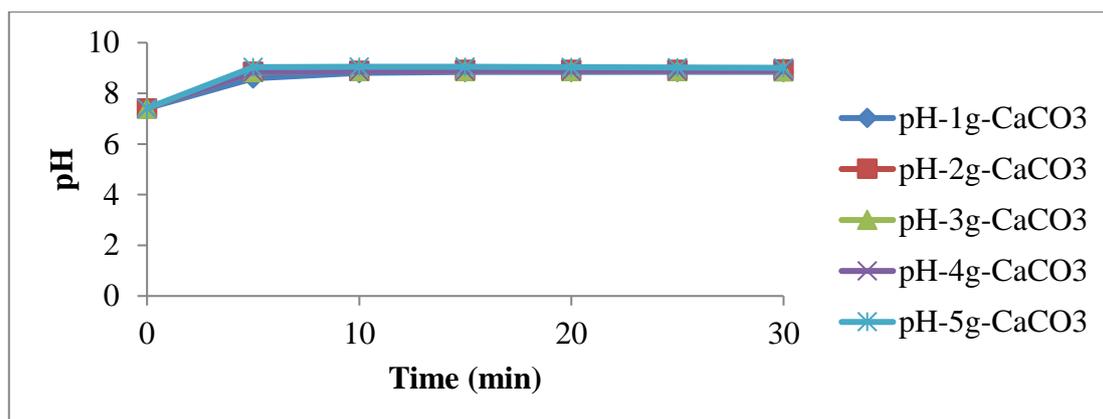


Fig. 2. Variation of pH as a function of time by varying the mass of calcium carbonate

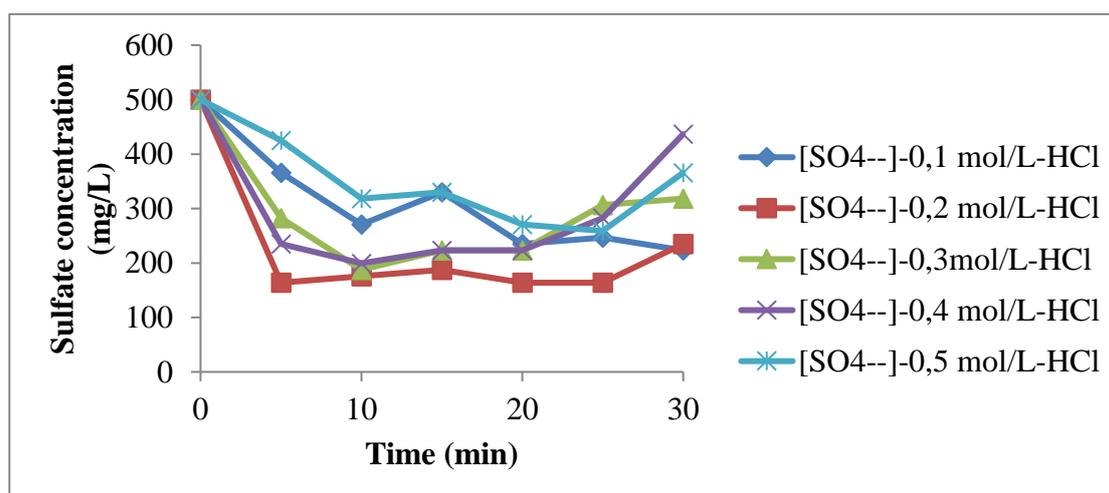


Fig. 3. Concentration of sulfates as a function of time by varying the concentration of HCl, for a quantity of 3g CaCO₃ with initial sulfate concentration of 500mg/L

The analysis of Fig. 3 shows a sudden drop in the concentration of sulfate ions (SO₄²⁻) for all concentrations of hydrochloric acid (HCl) used to obtain the suspension of acidified calcium carbonate, particularly between 5 and 10 min. From 10 min of stirring, a slight increase in sulfate ions is observed. Good elimination of sulfates is obtained for 0.2 mol/L of HCl. This drop in the concentration of sulfate ions would seem to be associated with the precipitation of calcium sulfate.

3.2.2 Evolution of the pH by varying the concentration of HCl

Fig. 4 illustrates the variation in pH over time by changing the concentration of hydrochloric acid per 3 g of the calcium carbonate suspension.

At the pH level, a rise in pH is recorded between 0 and 5 min which becomes slightly stable until



the end of the manipulation. Whatever the concentration of HCl used to obtain the acidified calcium carbonate suspension, the variation in pH remains identical.

3.3 Study of the Mechanism of Elimination of Sulfate IONS

In fact, in an acidic medium, the dissolution of CaCO₃ can be developed as follows:



The remainder of the CO₂ hydrolyzes in an aqueous medium, transforming into H₂CO₃, which dissociates according to the following equations:



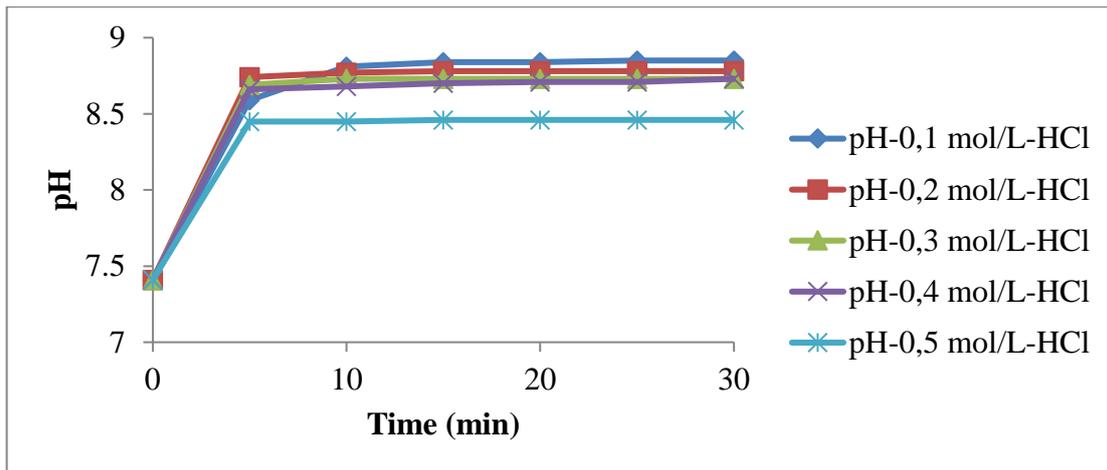


Fig. 4. Variation of pH as a function of time by varying the concentration of HCl


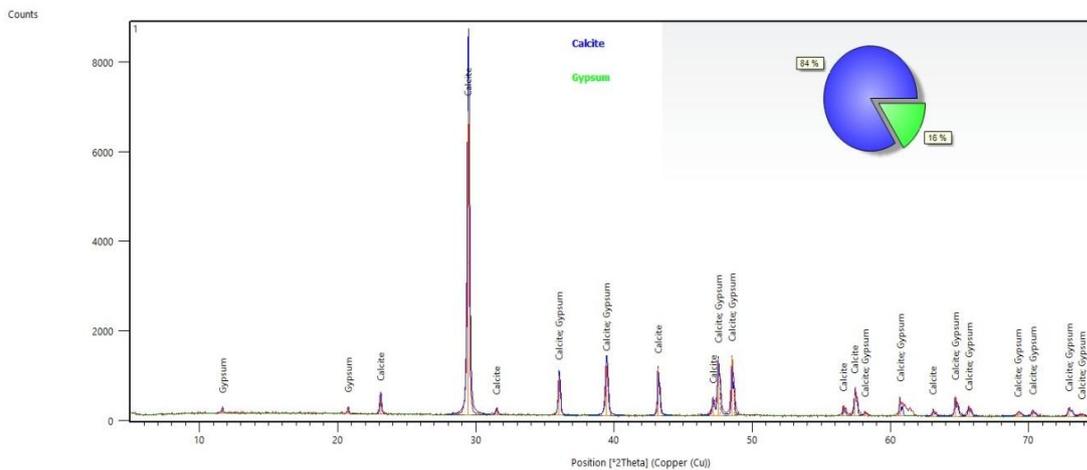


Fig. 5. XRD image of the precipitated solid for an initial sulfate concentration of 500 mg/L

The drop in sulfate ion concentration is directly associated with the mechanism of calcium sulfate precipitation ($\text{CaSO}_4 \cdot n\text{H}_2\text{O}$) according to the reaction in equation 4:



This result is similar to that of the work of Booth et al., [19] when they propose for the formation of gypsum an instantaneous germination type mechanism from the hypothesis that there is homogeneity of crystal size. According to Zarga and al., [20-24] the germination time of gypsum varies from 4 minutes for simple precipitations to 9 minutes for mixed precipitations. In this case, the parameter of major influence on the rate of gypsum production is without context the acidity of the solution.

3.4 X-ray Diffraction (XRD) Analysis Results

Fig. 5 illustrates the XRD analysis result of the solid deposit obtained after removal of sulfate ions by addition of an acidified calcium carbonate suspension. Analysis of this diffractogram shows peaks corresponding to gypsum thus supporting our mechanism suggested above.

4. CONCLUSION

The use of calcite in the treatment of sulfate-rich waters allows to record satisfactory results concerning the elimination of sulfates. The variation of the pH is linked to the dissolution of calcium carbonate with formation of HCO_3^- ions following the injection of hydrochloric acid. A

drop in the sulfate concentration was recorded from the beginning of the analysis which lasts a maximum of 10 min followed by the precipitation of gypsum as shown by the XRD.

DISCLAIMER (ARTIFICIAL INTELLIGENCE)

Author(s) hereby declare that NO generative AI technologies such as Large Language Models (ChatGPT, COPILOT, etc) and text-to-image generators have been used during writing or editing of this manuscript.

Also note the followings:

1. During the writing of this manuscript, Excel is only used for drawing the different curves. The DeepL is used to check the language used in the data.
2. For the XRD image, it comes from the photo of the characterization of the working sample.

COMPETING INTERESTS

Authors have declared that no competing interests exist.

REFERENCES

1. Grönwall J, Danert K. Regarding groundwater and drinking water access through a human rights lens: Self-supply as a norm. *Water*. 2020;12(2):419.
2. Levallois P. Drinking water and public health: current and future challenges. *Water Sciences Review*. 2006;19 (2):127-135.
3. Runtti H, Tolonen ET, Tuomikoski S, Luukkonen T, Lassi U. How to tackle the stringent sulfate removal requirements in mine water treatment—A review of potential methods. *Environmental Research*. 2018;167:207-222.
4. Tian X, Zhou Z, Xin Y, Jiang LM, Zhao X, An Y. A novel sulfate removal process by ettringite precipitation with aluminum recovery: Kinetics and a pilot-scale study. *J Hazard Mater*. 2019;365:572–580.
5. Dumas S. Bacterial corrosion in low-temperature geothermal energy: Corrosion mechanisms by *sulfate -reducing bacteria* (Doctoral dissertation, ANRT); 1987.
6. Intctmis L, Servi U, LA Tiui, PI Risk of pollution of freshwater tables due to geothermal exploitation of the Dogger aquifer in the Paris Basin; 1994.
7. Silva AM, Lima RM, Leão VA. Mine water treatment with limestone for sulfate removal. *J Hazard Mater*. 2012;221:45–55.
Available:
<https://doi.org/10.1016/j.jhazmat.2012.03.066>
8. Zahedi R, Mirmohammadi SJ. Sulfate removal from chemical industries' wastewater using ettringite precipitation process with recovery of Al(OH)₃. *Appl Water Sci*. 2022;12:226.
Available:<https://doi.org/10.1007/s13201-022-01748-7>
9. Bowell R. A review of sulfate removal options for mine waters. *Proceedings of Mine Water*. 2004;75–88.
10. Tansakul C. Hybrid membrane processes for seawater pretreatment before reverse osmosis desalination (Doctoral dissertation, National Institute of Applied Sciences of Toulouse); 2009.
11. Bannoud AH. Removal of hardness and sulfates from water by nanofiltration. *Desalination*, 2001;137(1-3):133-139.
12. Monzie I. Ion exchange for the production of very pure water: study of kinetic limitations by the micro-column method: extension to electrodeionization (Doctoral dissertation, Institut National Polytechnique de Lorraine); 2003.
13. Călinescu O, Marin NM, Ioniță D, Pascu LF, Tudorache A, Surpățeanue G, Badea IA, Aboul-Enein HY. Selective removal of sulfate ion from different drinking waters. *Environ Nanotechnol Monit Manag*. 2016;6:164–168.
Available:<https://doi.org/10.1016/j.enmm.2016.10.004>
14. Arahman N, Mulyati S, Lubis MR, Takagi R, Matsuyama H (2017) Removal profile of sulfate ion from mix ion solution with different type and configuration of anion exchange membrane in electro dialysis. *J Water Process Eng*. 2017;20:173–179.
Available:<https://doi.org/10.1016/j.jwpe.2017.10.007>
15. Alimi F, Elfil H, Gadri A. Kinetics of the precipitation of calcium sulfate dihydrate in a desalination unit. *Desalination*. 2003; 158(1-3):9-16.
16. Benatti CT, Tavares CRG, Lenzi E. Sulfate removal from waste chemicals by precipitation. *J Environ Manage*. 2009;90(1):504–511.
17. Brbootl MM, Abid BA, Al-Shuwaikl NM. Removal of heavy metals using chemicals

- precipitation. Eng. Technol. J. 2011; 29(3):595-612.
18. Tait S, Clarke WP, Keller J, Batstone DJ. Removal of sulfate from high-strength waste water by crystallization. Water Research. 2009;43 (3):762-772.
 19. Booth J, Hong Q, Compton RG, Prout K, Payne RM. Gypsum overgrowths passivate calcite to acid attack. Journal of Colloid and Interface Science. 1997;192 (1):207-214.
 20. Zarga Y, Boubaker HB, Ghaffour N, Elfil H. Study of calcium carbonate and sulfate co-precipitation. Chemical Engineering Science. 2013;96:33-41.
 21. Bingbing Tian, Yalong Song, Rubin Wang, Yi Wang, Tianyang Wang, Jinhui Chu, Zhu Qiao, Min Li, Jianjiang Lu, Yanbin Tong. Adsorption of sulfate ions from water by CaCl₂-modified biochar derived from kelp. RSC Sustain. 2023;1:898-913. DOI: 10.1039/D2SU00136E (Paper)
 22. Tolonen, E. T., Hu, T., Rämö, J., & Lassi, U. The removal of sulphate from mine water by precipitation as ettringite and the utilisation of the precipitate as a sorbent for arsenate removal. *Journal of Environmental Management*, 2016, vol. 181, p. 856-862
 23. Li, H., Bai, H., Wu, J., Ma, Z., Ma, K., Wu, G., ... & He, S. A cascade disaster caused by geological and coupled hydro-mechanical factors—water inrush mechanism from karst collapse column under confining pressure. *Energies*, 2017; 10(12), 1938.
 24. Li, S. C., Li, X. Z., Jing, H. W., Yang, X. L., Rong, X. L., & Chen, W. Z. Research development of catastrophe mechanism and forecast controlling theory of water inrush and mud gushing in deep long tunnel. *China Basic Science*, 2017; 19(3), 27-43.

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of the publisher and/or the editor(s). This publisher and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.

© Copyright (2024): Author(s). The licensee is the journal publisher. This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:

The peer review history for this paper can be accessed here:

<https://www.sdiarticle5.com/review-history/126283>